

TURBO 160

ELECTROMECHANICAL GEAR MOTOR FOR
SLIDING GATES UP TO 1600 KG



Electronic and mechanical parts well protected from weather conditions

Easy maintenance thanks to the horizontal control unit position

With fixing plate included

With slowdown function both in opening and closing



LCD display



Bronze gears




Sturdy and performing motors

MODELS

CODE	DESCRIPTION	PCS PALLET
SC162	For sliding gates up to 1600 Kg, 230 Vac motor, control unit with slowdown and electric limit switch	36 ⌚

⌚ INDICATES PRODUCTS WITH DELIVERY DATES WITHIN 6 WEEKS

DIMENSIONS

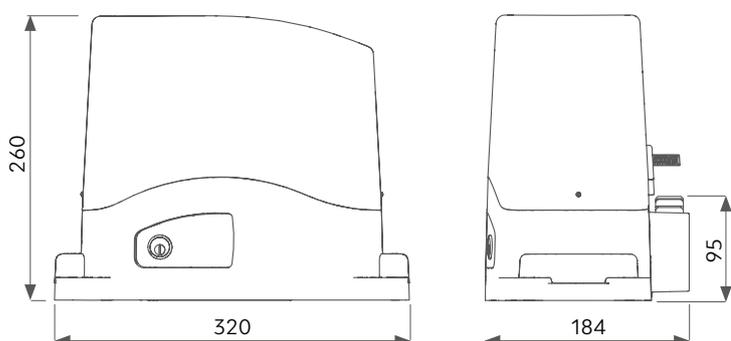

ACCESSORIES

SC162

MECHANICAL DATA

speed	cm/s	16
torque	Nm	40
working cycle	%	30

ELECTRICAL DATA

control board		CT102B
power	Vac	230
consumption	A	2,5
absorbed power	W	600
capacitor	μ F	20
thermoprotection	$^{\circ}$ C	150

GENERIC DATA

protection degree	IP	44
dimensions (L - D - H)	mm	320 - 184 - 260
weight	kg	14,7
working temperature	$^{\circ}$ C	-20 + 55
gate maximum weight	Kg	1600

ACCESSORIES



CREM-12**

M4 zinc coated rack 30x12 mm
L=1000 mm

€/m



RX4K

4-channel plug-in receiver,
433MHz, for CT202
control unit

PC 1

* Pack of 4 pcs